TGX 6X2 TAG AXLE TRACTOR

Chassis Specification: TGX 26.430 6x2-2 BL SA TGX 26.470 6x2-2 BL SA TGX 26.510 6x2-2 BL SA







TGX 6X2 TAG AXLE TRACTOR

TGX 26.430 6x2-2 BL SA TGX 26.470 6x2-2 BL SA TGX 26.510 6x2-2 BL SA

Base Cab Model TGX 'GN' Cab

For cab variants, options and specifications see separate cab specification sheet.

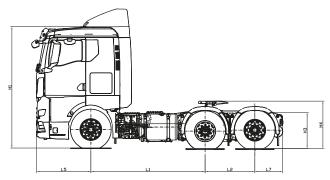

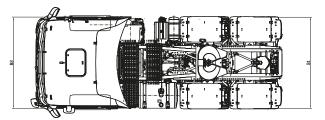

Vehicle Dimensions (mm)

| L1 | Wheelbase | | 3100 |
|----|---------------------------------------|-----------|------|
| L2 | Rear bogie spread | | 1350 |
| L5 | Front overhang | | 1475 |
| L7 | Rear overhang | | 750 |
| L9 | Centre line front axle to back of cab | | 805 |
| B1 | Width across rear tyres | | 2470 |
| B2 | Cab width over wings | | 2499 |
| H1 | Cab height | - laden | 3338 |
| | | - unladen | 3436 |
| H3 | Frame height at centre rear wheels | - laden | 950 |
| | | - unladen | 980 |
| H4 | Fifth wheel height | - laden | 1293 |
| | | - unladen | 1323 |

Turning Circle (m)

| WTW | Wall to Wall | 16.9 |
|--|--------------|------|
| KTK | Kerb to Kerb | 15.2 |
| Optimum fifth wheel position forward of third axle | | |

Unladen Weights (kg +/- 2.5%)

| Front axle | 5269 |
|------------|------|
| Rear axle | 3562 |
| Total | 8831 |

Unladen weights are for vehicle in standard specification with full tanks of fuel and AdBlue® and include driver.

| Plated/Operating Weights (kg) | | | UK Legal |
|-------------------------------|----------------------|-------|----------|
| GTW | Gross Train Weight | 44000 | 44000 |
| GVW | Gross Vehicle Weight | 26000 | 26000 |
| Front axle ⁽¹⁾ | | 8000 | 8000 |
| Midlift axle | | 11500 | 11500 |
| Rear axle | | 7500 | 7500 |

Tyre changes can affect legal weights. (1) 9000 kg front axle upgrade optional.

Optional Equipment & Weights

| 9000 kg capacity front axle | +119 | GM Cab | -5 |
|-----------------------------|------|---------------------------|-----|
| 9.00 x 22.5 Alloy Wheels | -112 | GX Cab | +54 |
| NH/4c PTO | +6 | Remove air management kit | -71 |
| Fixed fifth wheel | -57 | Steel front bumper | +64 |

All weights indicated above subject to +/- 2.5% manufacturer's tolerance. Changes to standard equipment will alter kerb weights.



| Engine Model - Euro 6 | D2676LFAJ | D2676LFAI | D26LFAF | Features |
|-----------------------|------------|------------|------------|---|
| Engine Power (PS) | 430 | 470 | 510 | Selective Catalytic Reduction |
| Rated Speed (rpm) | 1800 | 1800 | 1800 | Cruise Control |
| Torque (Nm) | 2200 | 2400 | 2600 | Exhaust brake |
| Torque Range (rpm) | 930 - 1350 | 930 - 1350 | 930 - 1350 | Road Speed Limiter (89 km/h) |
| Cylinders | 6 | 6 | 6 | ■ OBD-E |
| Capacity (cc) | 12419 | 12419 | 12419 | Suitable for EN15940 |

Performance at 44000 kg

| Engine Power | Gearbox | Axle Ratio | Geared Road Speed | Engin | e RPM | Starting Grade | Tyre Size |
|--------------|----------|------------|-------------------|---------|---------|----------------|-------------|
| | | | (mph) | @55 mph | @50 mph | | |
| 430PS | 12.26 DD | 2.53:1 | 82 | 1207 | 1085 | 33%+ | 315/80R22.5 |
| 470PS | 12.26 DD | 2.53:1 | 82 | 1207 | 1085 | 33%+ | 315/80R22.5 |
| 510PS | 12.26 DD | 2.53:1 | 82 | 1207 | 1085 | 33%+ | 315/80R22.5 |

Clutch

| Single plate 430mm diameter, asbestos | |
|---------------------------------------|--|
| free lining | |

Gearbox

| Ratios 1 16.69 2 12.92 3 9.93 4 7.67 5 5.90 6 4.57 7 3.66 8 2.83 9 2.17 10 1.68 11 1.29 12 1.00 R1 15.54 | | | | | |
|--|--|-------|--|--|--|
| 1 16.69 2 12.92 3 9.93 4 7.67 5 5.90 6 4.57 7 3.66 8 2.83 9 2.17 10 1.68 11 1.29 12 1.00 R1 15.54 | 12 Speed Tipmatic [®] Automated | | | | |
| 2 12.92 3 9.93 4 7.67 5 5.90 6 4.57 7 3.66 8 2.83 9 2.17 10 1.68 11 1.29 12 1.00 R1 15.54 | Ratios | | | | |
| 3 9.93 4 7.67 5 5.90 6 4.57 7 3.66 8 2.83 9 2.17 10 1.68 11 1.29 12 1.00 R1 15.54 | 1 | 16.69 | | | |
| 4 7.67 5 5.90 6 4.57 7 3.66 8 2.83 9 2.17 10 1.68 11 1.29 12 1.00 R1 15.54 | 2 | 12.92 | | | |
| 5 5.90 6 4.57 7 3.66 8 2.83 9 2.17 10 1.68 11 1.29 12 1.00 R1 15.54 | 3 | 9.93 | | | |
| 6 4.57 7 3.66 8 2.83 9 2.17 10 1.68 11 1.29 12 1.00 R1 15.54 | 4 | 7.67 | | | |
| 7 3.66 8 2.83 9 2.17 10 1.68 11 1.29 12 1.00 R1 15.54 | 5 | 5.90 | | | |
| 8 2.83 9 2.17 10 1.68 11 1.29 12 1.00 R1 15.54 | 6 | 4.57 | | | |
| 9 2.17 10 1.68 11 1.29 12 1.00 R1 15.54 | 7 | 3.66 | | | |
| 10 1.68 11 1.29 12 1.00 R1 15.54 | 8 | 2.83 | | | |
| 11 1.29 12 1.00 R1 15.54 | 9 | 2.17 | | | |
| 12 1.00 R1 15.54 | 10 | 1.68 | | | |
| R1 15.54 | 11 | 1.29 | | | |
| | 12 | 1.00 | | | |
| B2 12.03 | R1 | 15.54 | | | |
| | R2 | 12.03 | | | |

| Frame | | |
|--------------|----------------------|--|
| Construction | Bolted and riveted | |
| Material | S500MC | |
| Section | 270 x 85 x 8 mm | |
| Frame width | 942 - 762 mm waisted | |

Fuel Tank

| Capacity | 460 Litres |
|----------|---|
| Section | Regtangular steel LHS mounted Locking cap |

Axles

| Steer | Drop beam |
|-------|----------------------|
| Drive | Single reduction |
| Tag | Lifting non-steering |

Suspension

| Steer Axle | Single parabolic springs with shock absorbers and stabiliser |
|------------|--|
| Drive Axle | Electronically controlled air suspension with shock absorbers and stabiliser |
| Tag Axle | Shock absorbers and air operated lift |

Rims & Tyres

| Rims | Steer Midlift | Steel 9.00 x 22.5 Steel 9.00 x 22.5 |
|-------|------------------|--|
| | Drive | Steel 9.00 x 22.5 |
| Tyres | Steer | 315/80R22.5 |
| | Midlift | 315/80R22.5 |
| | Drive | 315/80R22.5 |

Electrical System

| Туре | CAN Bus system with |
|------------|---------------------------|
| | central on-board computer |
| Voltage | 24V |
| Alternator | 110 AMP |
| Batteries | 2 x 12v 230Ah |

Steering

| Туре | Hydraulically assisted |
|------|------------------------|
| | |

Braking System

| Туре | Electronic Brake System (EBS) with Anti-lock Braking System (ABS) |
|---------------|---|
| Features | Disc brakes, air dryer, asbestos free linings |
| Parking Brake | Spring brakes on rear axle |
| | |

Exhaust System


Ground discharge silencer, incorporating Diesle Particulate Filter (DPF)

General Equipment

| <u> </u> |
|--|
| 60 Litre AdBlue® tank |
| Electronic immobiliser |
| Fuel filter with water separator |
| Mechanical battery master switch |
| Audible reverse warning with night silent |
| Central locking doors |
| Electronically controlled and heated rear view mirrors |
| Air management kit |
| Catwalk and step |
| Sliding fifth wheel with lead up ramps |
| Hoses and couplings including ABS lead |
| Coupling lamp |
| Lane Guard System (LGS) |
| Emergency Brake Assist (EBA) |
| Electronic Stability Programme (ESP) |
| |

TGX 6X2 TAG AXLE TRACTOR

Cab Options

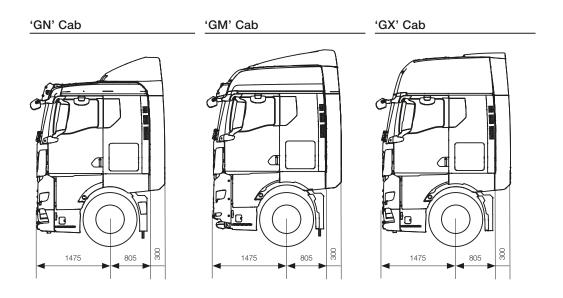

MAN Truck & Bus UK Ltd.,

Frankland Road, Blagrove, Swindon. Wiltshire SN5 8YU www.mantruckandbus.co.uk

Ref: MAN TGX 6X2TAGTRAC / 01 Issue Date: May 2022 Technical illustrations are not binding. Front cover picture may not be standard equipment. We reserve the right to make modifications in line with technical progress.